

WIPER MOTOR KIT INSTALLATION INSTRUCTIONS

P/N: 19101.03 (12V-ST) 12Volt Stainless Steel



19101.02 (12V) 12 Volt Kit - Black

19101.04 (24V) 24 Volt Kit – Black

Installation Notes: The S terminal should be connected to one side of the control switch. The other lead wire from the switch will need to be grounded.

The – terminal should be connected to a good ground on the vehicle chassis or to the battery’s negative terminal.

The + terminal should be connected to the original fused wiper motor wire or fused battery positive wire. Use a 10amp fuse if a new wire assemble is to be used.

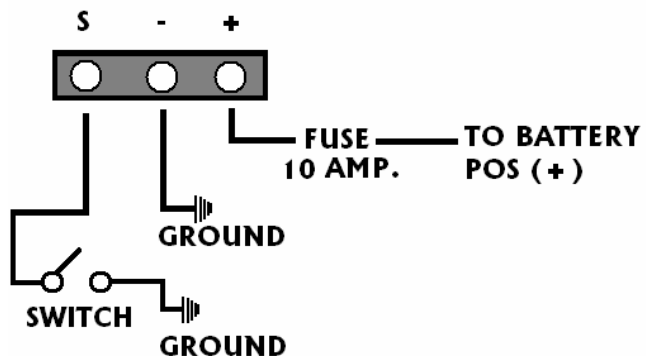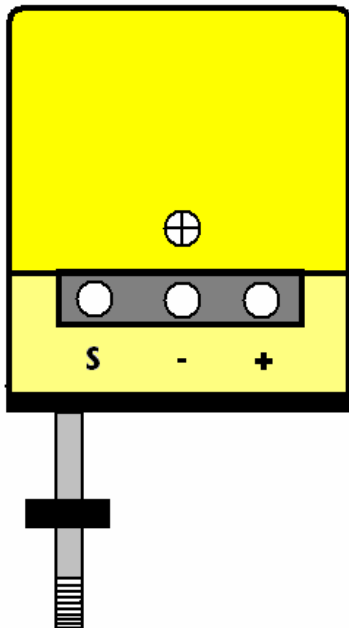

Date: 5/19/06